

# ADA B45

## SOLAR BOLLARD

**Designed in aluminum and treated to withstand the harshest conditions**, the Solux solar bollards will be perfect for all your lighting, marking, and beautification applications for your outdoor living spaces with total energy autonomy. Equipped with high-efficiency solar cells, the light fixture charges in the sun but also in cloudy weather, ensuring **optimal lighting throughout the year**.

NOMINAL FLUX ..... **420 LUMENS**  
NOMINAL POWER ..... **3.5 WATTS**

### LIGHTING

Efficiency ..... **120 Lumens/Watts**  
Chips LED ..... **PHILIPS Luxeon 30-30**  
LED lifetime ..... **Over 80 000 hours LM80**  
Optics/CCT ..... **T-V / 2300K to 6500K (Dual CCT optional)**  
Light Height ..... **17,72" (45 cm)**

### BATTERY

Technology ..... **Lithium Iron Phosphate LIFEP04**  
Capacity ..... **28Wh**  
Autonomy ..... **Over 24 hours at full charge - 4 Rainy Days back up**  
Charging time ..... **6 hours**  
Lifespan ..... **Over 3000 CYCLES @ 80% DOD over 10 years Lifetime**  
Working temp. .... **14°F to 158°F (optional -40°F to 158°F) -10°C to 70 °C - (optional -40°C TO 70 °C)**

### ENERGY

Solar panel ..... **6 Wc**  
Cells type ..... **Monocrystalline Panel Grade A 25 years**  
Certificates ..... **IEC 61215 - IEC 61730 I and II - IEC 60904**

### ELECTRONIC

Sensor ..... **PIR 180° sensor (optional)**

### DIMENSIONS

Product ..... **D10,24" x H17,72" (D26cm x H45cm)**  
Carton size ..... **19,69" x 12,60" x 13,00" (50cm x 32 cm x 33 cm)**  
Weight ..... **7,10 lb (3.2 KG)**  
Materials ..... **Die cast aluminum**  
Installation ..... **Concrete base or insert on support**  
Product code ..... **SL-021 45**

*Solux retains the right to modify or change product specifications without prior notice, as part of our ongoing commitment to improvement*



### CERTIFICATIONS

**IEC / TUV / EMC / LM-79- 08 and LM-80 test standards / IK8 / IP65 / CE / ULOR**

**5  
YEARS**

**\* Solux offers a 5 Year Limited Warranty** for the Solar Bollard-Series luminaire to be free from defects in material and workmanship for up to five (5) years from date of shipment. This limited warranty covers all components when installed and operated according to Solux instructions. Fixture suitable for ambient temperature from -10° to 50°. PV Panels - 20 year performance warranty Controller & Batteries : 5 years

ADA B45 - SOLAR BOLLARD - DATA SHEET / Page 1 of 5

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

# LUMINAIRE & LEDS


The **ADA B45** bollard incorporates the latest LED technologies, its elegance and ease of installation will meet your lighting needs. ADA is equipped with **LED chips, combining performance and robustness with 120 lumens per watt.**

## A TOTAL OF 420 LUMENS



Our light fixture also complies with current standards concerning light pollution.



### SYMMETRICAL DISTRIBUTION

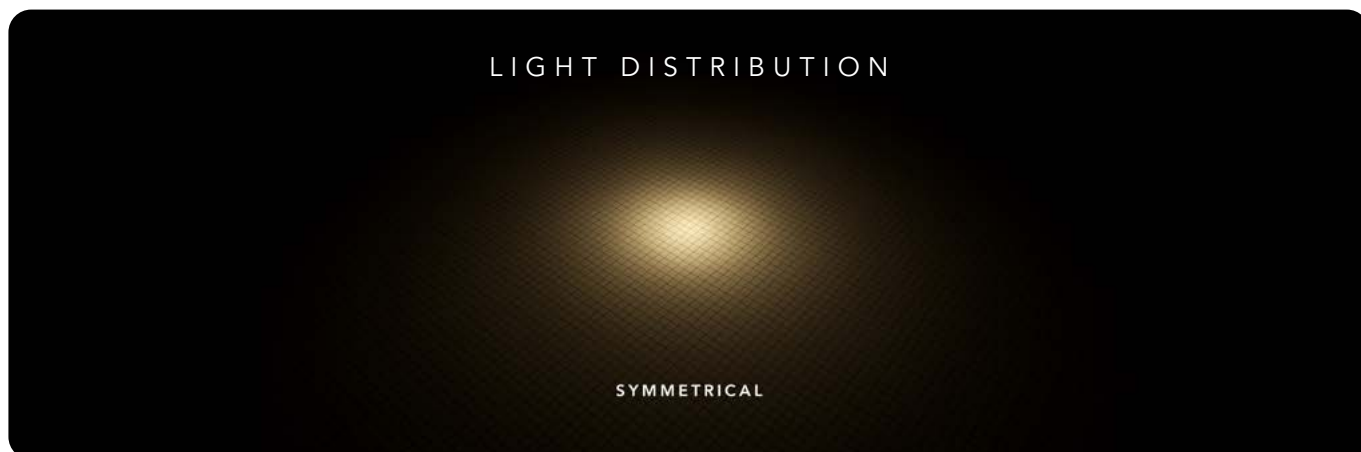

### PHOTOMETRIC CURVE

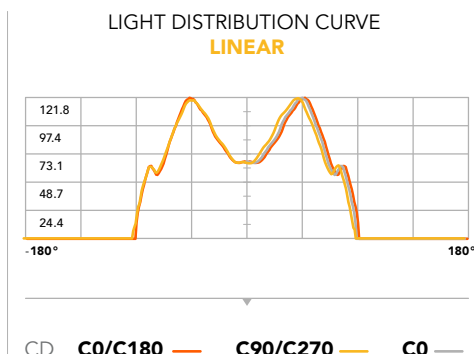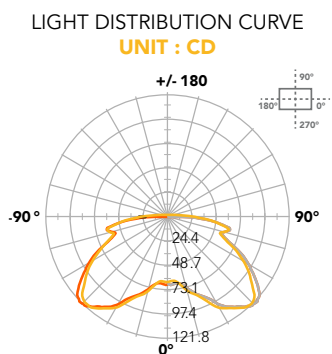

DOWNLOAD IES FILES



ADA B45 - SOLAR BOLLARD - DATA SHEET / Page 2 of 5

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

# BATTERY LIFEPO4

## OVER 10 YEARS LIFESPAN

The ADA bollard is equipped with Lithium Iron Phosphate LIFEPO4 batteries, recognized as the **best battery technology** in terms of **longevity, safety, and performance** for solar applications. Our batteries enjoy a lifespan of over **3000 cycles, which is more than 10 years at 80% DOD.**



## EXTREME TEMPERATURE

**14°F to 158°  
- 10 °C TO 70 °C**


While standard batteries benefit from an operating temperature of -10°C to 70°C, Solux offers as optional a new Special LIFEPO4 battery with working range of 40°F to 158°F -40°C to 70°C.

## BMS ELECTRONIC PROTECTION BATTERY MANAGEMENT SYSTEM

Our batteries are equipped with **electronic circuit boards for a higher protection**, ensuring battery functioning optimization in any situation.

THE BMS PROTECTS AGAINST

- OVER/UNDER CURRENT • OVERLOAD • OVER/UNDER VOLTAGE
- OVER/UNDER CHARGE • TEMPERATURE MANAGEMENT

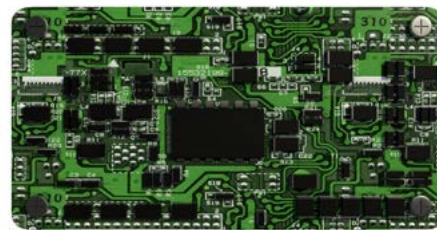

## COMPARISONS OF DIFFERENT BATTERY TECHNOLOGIES

**LIFETIME & CYCLES AT 80% DOD\***  
*Comparison of different battery technologies*



Lead Acid  
**200**



NimH  
**700**




Lithium ION  
**800**




Lithium LifePO4  
**3 000**


**CHARGING TEMPERATURE RANGE WITHOUT CAPACITY LOSS**  
*Minimum & Maximum temperature range for Optimal charging during the day*




Lead Acid



NimH



Lithium ION



Lithium LifePO4

ADA B45 - SOLAR BOLLARD - DATA SHEET / Page 3 of 5

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA


# SOLAR PANEL

Solar cells **GRADE A**

## 6 WATTS

Encapsulated Monocrystalline Solar Panel **Grade A** Solar Cell with Tempered Glass.



### OUR PV PERFORMANCE GUARANTEE

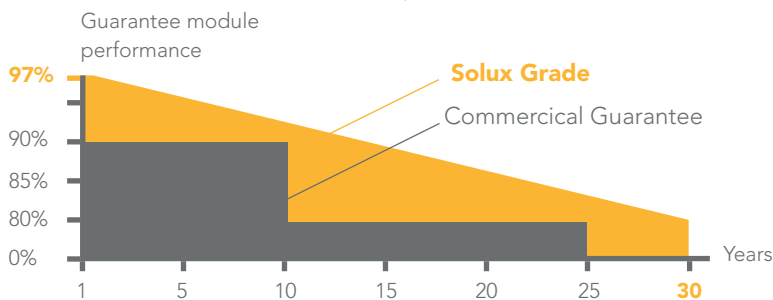

# PRESENCE DETECTOR INFRA-RED SENSOR

### THE ADA BOLLARD AUTOMATICALLY TURNS ON AT DUSK AND OFF AT DAWN.

Solux offers optional PIR movement sensor. The infra red detector integrated into the light fixture will increase the light power as pedestrians or vehicles pass, thus providing a higher level of safety while respecting the environment.

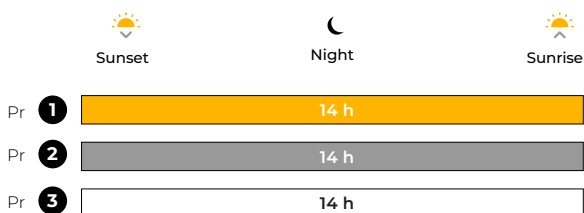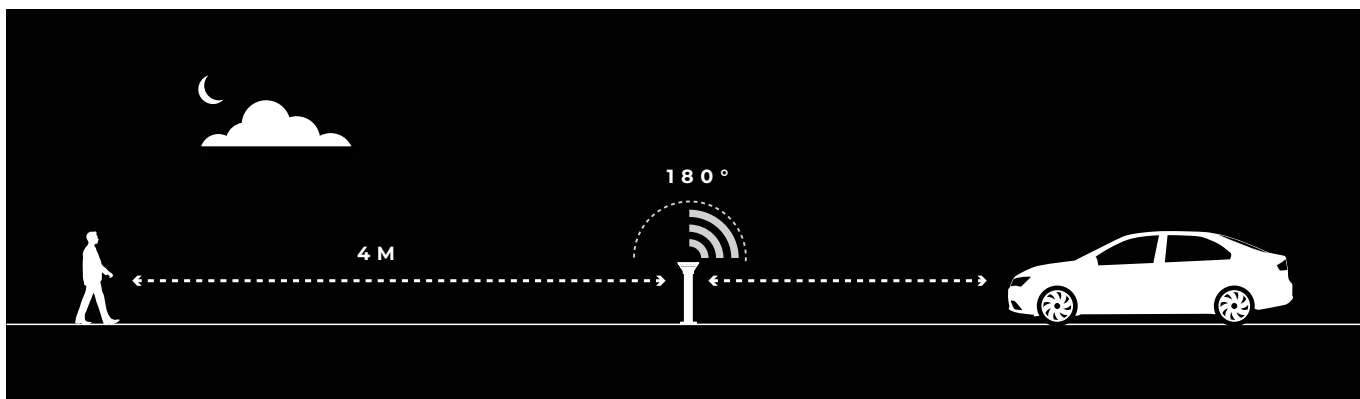

Depending on the geographical area, we will select the % of light reduction.

- Program 1** > 40% Dim + 100% ON during 20 sec
- Program 2** > 30% Dim + 100% ON during 20 sec
- Program 3** > 20% Dim + 100% ON during 20 sec




# EASY INSTALLATION

## NO CABLING & TRENCHING

The ADA comes in two different mounting types, both requiring **neither trenching or cabling** for a **fast and economical installation**.


**Simply insert the bollard into concrete or mount it on anchor rods.**

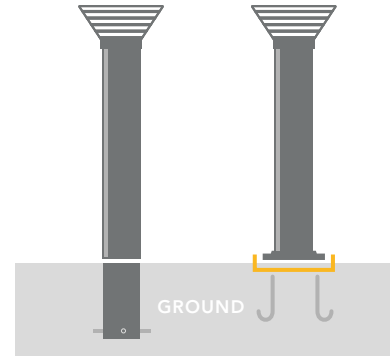

**1** DIRECT BURIED      **2** FLAT MOUNT

# DIMENSIONS

## BOLLARD AND BASE

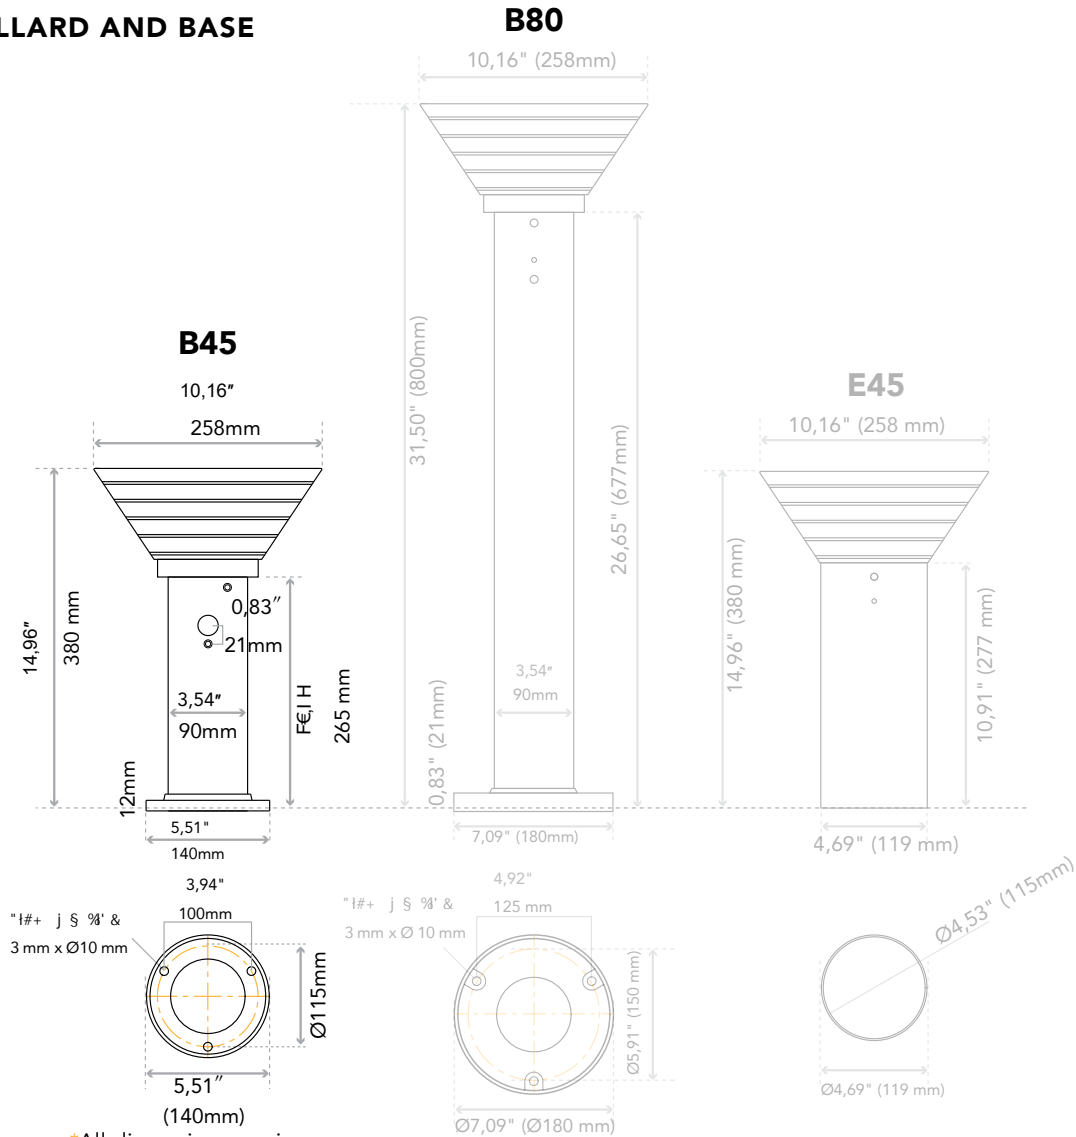

\*All dimensions are in mm

